

**Flexible conduits
metal plastic**



FA conduit

Flexible PVC covered conduit with simple hemming structure. High resistance to abrasion, dilute acids and oils.


pack (m)	cat. nos. grey	diameter	
		inside	outside
50	3874 20	8	12
50	3874 21	10	14
50	3874 22	12	15.5
50	3874 23	15	19.9
50	3874 24	20.5	24.5
25	3874 25	26.5	31.5
25	3874 26	34.5	40
25	3874 27	39.5	45
25	3874 28	50.5	56

pack (m)	cat. nos. black	diameter	
		inside	outside
50	3874 29	8	12
50	3874 30	10	14
50	3874 31	12	15.5
50	3874 32	15.5	19.5
50	3874 33	20.5	24.5
25	3874 34	26.5	31
25	3874 35	34.5	40
25	3874 36	39.5	45
25	3874 37	50.5	56

**Flexible conduits
metal plastic**

FA

Dimensions

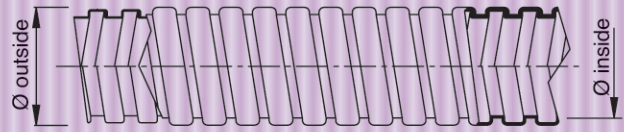

Characteristics:

material: Flexible galvanized steel (FeP01-02) PVC covered
 temperature rating: -15°C +60°C
 classification CEI EN 50086 : 3 3 3 1
 self-extinguishing: non-flame propagating according to CEI EN 50086
 UV resistance: superior
 index of protection: IP42 with MG and 2000 metal connectors
 IP65 with 2000 metal connectors and adaptor rings

→ BENDING RADIUS PAGE 22

CHEMICALS	FA conduits
Unleaded petrol	Good resistance
Industrial detergent	High resistance
Diesel oil	Good resistance
Lubricant oil	High resistance
Emulsifying solution	High resistance
Diluting Alkene solution	Low resistance
Washing solvent	Low resistance

Connectors:



**Flexible conduits
metal plastic**



FA 2000 conduit

Flexible PVC covered steel conduit with double hemming structure for high flexibility. 2000 range connectors suitable with joint washers.


pack (m)	cat. nos. grey	diameter		rta cat. nos.
		inside	outside	
50	3872 71	10.0	13.5	FA2010
50	3872 72	12.0	15.5	FA2012
50	3872 73	15.5	19.5	FA2016
50	3872 74	20.5	24.5	FA2021
25	3872 75	26.5	31.5	FA2027
25	3872 76	34.5	40.0	FA2035
25	3872 77	39.5	45.0	FA2040
25	3872 78	50.5	56.0	FA2052

pack (m)	cat. nos. black	diameter		rta cat. nos.
		inside	outside	
50	3872 80	10.0	13.5	FA2010N
50	3872 81	12.0	15.5	FA2012N
50	3872 82	15.5	19.5	FA2016N
50	3872 83	20.5	24.5	FA2021N
25	3872 84	26.5	31.5	FA2027N
25	3872 85	34.5	40.0	FA2035N
25	3872 86	39.5	45.0	FA2040N
25	3872 87	50.5	56.0	FA2052N

**Flexible conduits
metal plastic**

FA 2000

Dimensions

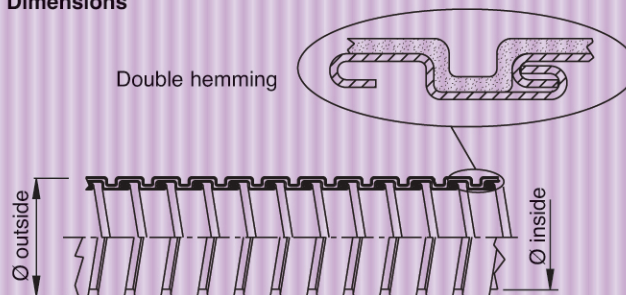

Characteristics:

material: Flexible galvanized steel (FeP01-02) PVC covered
 temperature rating: -15°C +60°C
 classification CEI EN 50086 : 4 4 3 1
 self-extinguishing: non-flame propagating according to CEI EN 50086
 UV resistance: superior
 index of protection: IP65 with 2000 connectors

→ BENDING RADIUS PAGE 22

CHEMICALS	FA2000 conduits
Unleaded petrol	Good resistance
Industrial detergent	High resistance
Diesel oil	Good resistance
Lubricant oil	High resistance
Emulsifying solution	High resistance
Diluting Alkene solution	Low resistance
Washing solvent	Low resistance

Connectors:

