

Type 1005P, XUL Fire Protection Sprinkler Service Gauge



FEATURES

- Underwriters Laboratory listed and Factory Mutual approved
- Corrosion-resistant ABS case
- Heat-resistant polycarbonate push-in window
- Patented PowerFlex™ movement with polyester segment
- True Zero™ indication, a unique safety feature

Ashcroft® fire protection sprinkler gauges are Underwriters Laboratory listed and Factory Mutual approved for fire protection sprinkler service. The case material on Type 1005P, XUL gauges is ABS. The 0-300 psi pressure range is used on "wet" systems where water is available to the sprinkler heads. The 0-80 retard to 250 psi pressure range is used on dry systems where the lines are filled with air pressure until system activation.

The patented PowerFlex™ movement with polyester segment is designed to provide unequalled shock and vibration resistance resulting in superior performance and extended gauge life.

True Zero™ indication, a standard feature on these gauges, reduces the potential risk of installing a damaged gauge on your equipment.

PRODUCT SPECIFICATIONS

Ashcroft® Model No.:	1005P, XUL
Accuracy:	ASME B 40.100 Grade B (±3-2-3% of span)
Size:	3½"
Case:	ABS (Polycarbonate blend)
Ring:	None
Window:	Polycarbonate, push-in
Dial:	Black figures on white background
Pointer:	Black, aluminum
Bourdon tube:	"C" shaped bronze
Movement:	Patented PowerFlex™ with polyester segment
Socket:	Brass
Restrictor:	None
Connection:	¼ NPT lower
Ranges:	0-300 psi (water) 0-80 retard to 250 psi (air)
Operating temperature:	-40°F to 150°F; -40°C to 65°C
UL 393 Listed, UL of Canada Listed and FM approved. Equivalent (single or dual scale) metric scales are available	

OPTIONAL FEATURES


Customized dials
Other UL listed ranges on application
FlutterGuard™

HOW TO ORDER (Typical example)

	35	W	1005	P	H	02L	XUL	300#
Dial Size: 3½"								
Movement: Patented PowerFlex™								
Case Type Number: 1005P								
Case Material: ABS								
Socket Material: Brass								
Connection Size/Location: ¼ NPT Lower								
Listing: UL listed, FM approved								
Range: 0/300 psi								

Type 1005P, XUL Fire Protection Sprinkler Service Gauge

DIMENSIONS

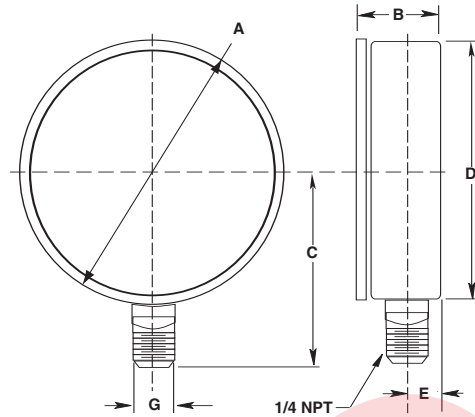

SIZE/TYPE	A	B	C	D	E	G
3 1/2"	3.70	1.14	0.72	x.xx	0.47	0.56
1005P, XUL	(94)	(29)	(69)	(xx)	(11.9)	(14.2)