


**Duratemp® Thermometer
Series 600A-01
Accuracy ($\pm 1\%$ F.S.)**

- **Exclusive movementless design resists shock and vibration – no gears to wear or misalign resulting in increased instrument life**
- **Gas-operated molecular sieve**
- **No elevation error**
- **Mercury free**
- **One bulb size for all ranges**
- **±1% full-span accuracy**
- **Maxivision® dial**
- **Readily available – two to three weeks delivery**
- **Limited five-year warranty**

A high impact-resistant polished stainless steel case. Bayonet ring facilitates easy removal for glass replacement and pointer adjustment. A versatile case that enables surface or flush mounting. Available in 4½" dial size.

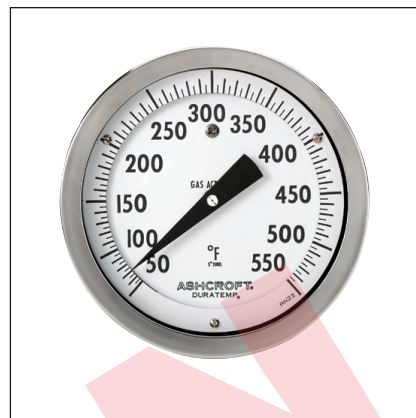

SELECTION TABLE

600A — 01				C01				B01				A1				L07				AK			
Table 1				Table 2				Table 3				Table 4				Table 5				Table 6			
CASE STYLE				CASE SIZE		MOUNTING				BULB STYLES*				ARMOR STYLE		LINE LENGTH		RANGES					
CODE	DESCRIPTION			CODE	SIZE	MOUNTING		CONNECTION		CODE	DESCRIPTION			CODE	DESCRIPTION	CODE	LINE LENGTH	CODE	SINGLE RANGES				
01	ST. ST. BAYONET RING			C01	4 1/2	✓	FLUSH	LOWER	REAR	B01	12" Bendable extension with 1/2 NPT union connection			A1	Stainless Steel Spring	L01	5´	AB	-320/200°F				
																L03	10´	AE	-100/100°F				
																L07	20´	AG	-40/180°F				
																		AK	20/240°F				
																		AL	50/300°F				
																		AN	50/550°F				
														L09	30´	AR	50/750°F						
																AT	400/1200°F						
																AY	-200/100°C						
																BL	-80/40°C						
														L13	50´	BN	-40/80°C						
																BS	0/120°C						
																BT	10/150°C						
																BU	0/300°C						
														L19	80´	BW	0/400°C						
																BJ	200/650°C						
																DUAL RANGES							
																CE	20/240°F						
														CF	0/120°C								
															DR	50/550°F							
														DT		0/300°C							
																50/300°F							
																10/150°C							
																-40/180°F							
																-40/80°C							

TO ORDER THIS DURATEMP 600A-01 THERMOMETER:

Select:

1. Case Style: Stainless Steel/Bayonet Ring _____ Table 1 _____

2. Case Size & Mounting: 4½" Surface, Lower _____ Table 2 _____

3. Bulb Style: 12" Bendable Extension
with Union Connection _____ Table 3 _____

4. Armor Style: Stainless Steel Spring _____ Table 4 _____

5. Line Length: 20 feet _____ Table 5 _____

6. Temperature Range: 20/240°F _____ Table 6 _____

7. Options: Stainless Steel Tag _____ (See Page 210) _____

**Consult factory for guidance in product selection
Phone (203) 385-0217, Fax (203) 385-0602 or
visit our web site at www.ashcroft.com**

MADE IN U.S.A.