


- ***Exclusive movementless design resists shock and vibration – no gears to wear or misalign resulting in increased instrument life***
- ***Gas-operated molecular sieve***
- ***No elevation error***
- ***Mercury free***
- ***One bulb size for all ranges***
- ***±1% full-span accuracy***
- ***Maxivision® dial***
- ***Readily available – two to three weeks delivery***
- ***Limited five-year warranty***

A black-coated aluminum case with excellent impact resistance. Threaded ring permits adjustment. Available in 4½" and 6" sizes.

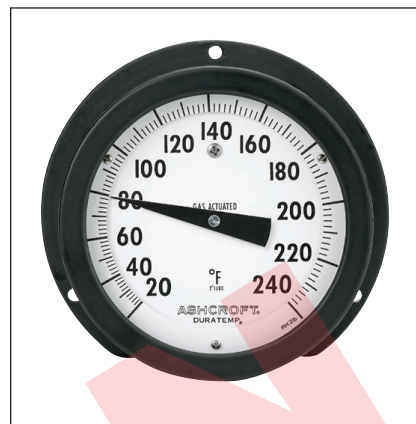

SELECTION TABLE

600A	600A — C03		C02		B01		A1		L07		AK					
	Table 1		Table 2					Table 3		Table 4		Table 5		Table 6		
	CASE STYLE		CASE SIZE		MOUNTING			BULB STYLES*		ARMOR STYLE		LINE LENGTH		RANGES		
	CODE	DESCRIPTION	CODE	SIZE	MOUNTING		CONNECTION		CODE	DESCRIPTION	CODE	DESCRIPTION	CODE	LINE LENGTH	CODE	SINGLE RANGES
					SURFACE	FLUSH	LOWER	REAR								
	03	ALUMINUM THREADED RING	C02	4½	✓		✓		B01	12" Bendable extension with ½ NPT union connection	A1	Stainless Steel Spring	L01	5´	AB	–320/200°F
			C15	6	✓		✓								AE	–100/100°F
															AG	–40/180°F
															AK	20/240°F
															AL	50/300°F
															AN	50/550°F
									B03	Plain bulb with rigid extension, no union			L03	10´	AR	50/750°F
														AT	400/1200°F	
								B08	Plain bulb with rigid extension, ½ NPT union on armor					AY	–200/100°C	
														BL	–80/40°C	
														BN	–40/80°C	
														BS	0/120°C	
														BT	10/150°C	
								B17	18" Bendable extension with ½ NPT union connection					BU	0/300°C	
														BW	0/400°C	
														BJ	200/650°C	
								B18	24" Bendable extension with ½ NPT union connection						DUAL RANGES	
								*Minimum recommended insertion length ("u" dimension) in liquids is 4 inches and in gases is 6 inches for standard ¾ x 3" bulb						CE	20/240°F 0/120°C	
														CF	50/550°F 0/300°C	
														DR	50/300°F 10/150°C	
														DT	–40/180°F –40/80°C	

TO ORDER THIS DURATEMP 600A-03 THERMOMETER:

Select:

1. Case Style: Aluminum/Threaded Ring _____ Table 1 _____

2. Case Size & Mounting: 4½" Surface, Lower _____ Table 2 _____

3. Bulb Style: 12" Bendable Extension
with Union Connection _____ Table 3 _____

4. Armor Style: Stainless Steel Spring _____ Table 4 _____

5. Line Length: 20 feet _____ Table 5 _____

6. Temperature Range: 20/240°F _____ Table 6 _____

7. Options: Stainless Steel Tag _____ (See Page 210) _____

**Consult factory for guidance in product selection
Phone (203) 385-0217, Fax (203) 385-0602 or
visit our web site at www.ashcroft.com**

MADE IN U.S.A.