


- **Exclusive movementless design resists shock and vibration – no gears to wear or misalign resulting in increased instrument life**
- **Gas-operated molecular sieve**
- **No elevation error**
- **Mercury free**
- **One bulb size for all ranges**
- **±1% full-span accuracy**
- **Maxivision® dial**
- **Readily available – two to three weeks delivery**
- **Limited five-year warranty**

The phenolic case construction is ideal for most ambient conditions. Flush or surface mounting. Snap ring permits pointer adjustment. Available in 4½", 6", and 8½" sizes.

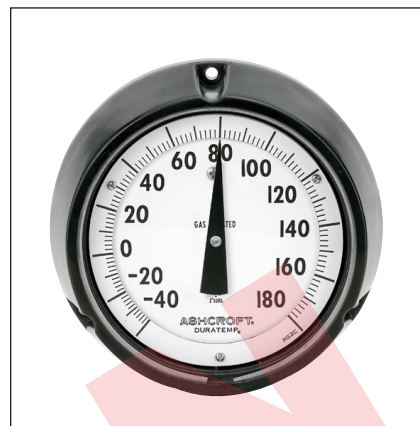

SELECTION TABLE

600A — 04		C03		B01		A1		L07		AK	
Table 1 CASE STYLE		Table 2 CASE SIZE		Table 3 BULB STYLES*		Table 4 ARMOR STYLE		Table 5 LINE LENGTH		Table 6 RANGES	
CODE	DESCRIPTION	CODE	SIZE	MOUNTING		CODE	DESCRIPTION	CODE	LINE LENGTH	CODE	SINGLE RANGES
				SURFACE	FLUSH						
04	PHENOLIC SNAP RING	C03	4½"	✓		✓				AB	–320/200°F
		C08	4½"	✓						AE	–100/100°F
		C38	4½"		✓					AG	–40/180°F
		C16	6"	✓		✓				AK	20/240°F
		C42	6"		✓					AL	50/300°F
B01	12" Bendable extension with ½ NPT union connection									AN	50/550°F
										AR	50/750°F
										AT	400/1200°F
										AY	–200/100°C
										BL	–80/40°C
B03	Plain bulb with rigid extension, no union									BN	–40/80°C
B08	Plain bulb with rigid extension, ½ NPT union on armor									BS	0/120°C
B17	18" Bendable extension with ½ NPT union connection									BT	10/150°C
B18	24" Bendable extension with ½ NPT union connection									BU	0/300°C
*Minimum recommended insertion length ("u" dimension) in liquids is 4 inches and in gases is 6 inches for standard ¾ x 3" bulb										BW	0/400°C
										BJ	200/650°C
										DUAL RANGES	
										CE	20/240°F
											0/120°C
										CF	50/550°F
											0/300°C
										DR	50/300°F
											10/150°C
										DT	–40/180°F
											–40/80°C

TO ORDER THIS DURATEMP 600A-04 THERMOMETER:

Select:

- Case Style: Phenolic Snap Ring _____ Table 1 _____
- Case Size & Mounting: 4½" Surface, Lower _____ Table 2 _____
- Bulb Style: 12" Bendable Extension with Union Connection _____ Table 3 _____
- Armor Style: Stainless Steel Spring _____ Table 4 _____
- Line Length: 20 feet _____ Table 5 _____
- Temperature Range: 20/240°F _____ Table 6 _____
- Options: Stainless Steel Tag _____ (See Page 210) _____

Consult factory for guidance in product selection
 Phone (203) 385-0217, Fax (203) 385-0602 or
 visit our web site at www.ashcroft.com