


Pocket Test Bimetal Thermometer Series FT, ASME B40.3, Grade A ($\pm 1\%$ of span)

- $\pm 1\%$ accuracy
- 304 stainless steel case and stem
- Extra-heavy polycarbonate window
- 5" stem length
- Hermetically sealed case
- Externally adjustable
- Protective polyethylene clip-sheath

The sturdy 1" test thermometer offers accuracy and versatility normally found in larger, more expensive instruments. The Ashcroft® pocket test thermometer provides precise temperature readings in solids, liquids, and gases – such as frozen food, meats, vats, cookers, stills, air-conditioning ducts, and in numerous other places. Protective clip-sheath fastens securely to a pocket, holding the thermometer safely, yet readily accessible.

An external adjustment feature permits simple zero reset in seconds by clamping hex nut under head firmly and rotating the head by hand.

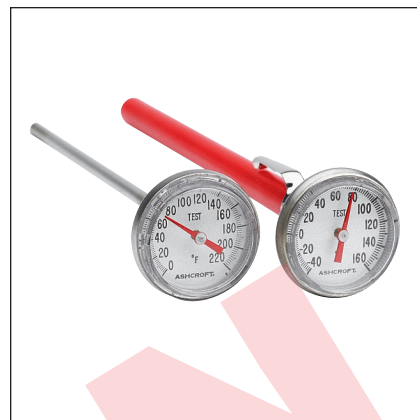

SELECTION TABLE

Case Size		Style Code	Stem				Stem Lengths Available		Temperature Range			
Dial	Code		Connection	Code	Connection	Code	"S" Length (inches)	Code	°F Fahrenheit	°/Div.	°C Celsius	°/Div.
1"	10	FT	Plain	50	Rear	R	5	050	-80/120	2	-30/50	2
									-40/160			
									-20/120			
									25/125			
									0/220			
									60/300	5	0/200	5
									50/550			

TO ORDER THIS FT SERIES BIMETAL THERMOMETER:

Select:

1. Case Size: 1" Code 10 _____ 10

2. Style: Code FT _____ FT

3. Stem Conn: Pointed plain Code 50 _____ 50

4. Stem Location: Rear Code R _____ R

5. Stem Length: 5" Code 050 _____ 050

6. Range: Code 0/220°F _____ 0/220°F

Consult factory for guidance in product selection
Phone (203) 385-0217, Fax (203) 385-0602 or
visit our web site at www.ashcroft.com