

## Model RXLdp Ultra-Low Differential Pressure Transmitter



LOOK FOR THIS  
AGENCY MARK ON  
OUR PRODUCTS

### APPLICATIONS:


*HVAC, fume hood control, lab/clean room pressurization, laminar flow, leak detection, medical, fan tracking, glove-box and velocity measurements*

### FEATURES:

- 0.1~50" H<sub>2</sub>O pressure ranges
- CE approval option
- High overpressure protection
- Stainless steel & Lexan NEMA 1 construction
- Five types of output signals available
- Mounts inside standard 3 1/2" electrical box
- Board level OEM versions available
- On-board voltage regulation allows use of lower cost unregulated power supply

Featuring a highly reliable variable capacitance sensor using the patented Ashcroft® SiGlas™ sensor. This ultra-thin single crystal diaphragm provides inherent sensor repeatability and stability.

#### SENSOR CROSS SECTION



The silicon diaphragm sensor has no glues or other organics to contribute to drift or mechanical degradation over time.

The patented Si-Glas™ technology combines the high sensitivity of a variable capacitance transducer with the repeatability of a micro machined, ultra-thin single crystal silicon diaphragm.

The Ashcroft Si-Glas sensor enables precise measurement and control of very low pressure. Although the diaphragm deflects only a micron, the sensor is 100 times more sensitive to pressure than available silicon piezo-resistive pressure sensors. The Si-Glas sensor is composed of sputtered metals and glass molecularly bonded to silicon. There are no epoxies or other organics in the sensor to contribute to drift or mechanical degradation over time.

### PERFORMANCE SPECIFICATIONS

Ref. Temperature: 70°F ±2°F (21°C ±1°C)

**Accuracy Class (of Span): 1.0%**

Includes non-linearity (Terminal Point Method), hysteresis, non-repeatability, zero offset and span setting errors.

**Stability – Max. Change (Span/year): ±0.5 %**

**Standard Ranges (Inches W.C.)**

**Unidirectional Ranges:**

**Differential or Gauge**

0/0.1	0/1.0	0/3.0	0/50.0
0/0.25	0/1.5	0/5.0	
0/0.5	0/2.0	0/10.0	
0/0.75	0/2.5	0/25.0	

**Bidirectional Ranges:**

**Compound**

±0.05	±0.5	±5.0
±0.1	±1.0	±10.0
±0.25	±2.5	±25.0

**Custom Ranges:** Special range calibration, (XCL) – Consult factory

**Response Time Standard:** 250ms (factory set)  
(Consult factory for dampening options)

### ENVIRONMENTAL SPECIFICATIONS

**Temperature Limits:**

Storage: –40 to 180°F

Operating: 0 to 160°F

(10-95% R.H. noncondensing)

Compensated Range: 40 to 125°F

**Thermal Coefficients:**

ZERO ±0.025% Span/°F

SPAN ±0.025% Span/°F

**Vibration Sweep:** Less than ±0.05%F.S. temporary effect with 5 g's 0-60Hz

**EMC:** CE model compliant to EN61326: 1997

Annex A. Harmonized heavy industrial transmitter specification

### FUNCTIONAL SPECIFICATIONS

**Overpressure Limits:**

Proof 15 psid

Burst 25 psid

Max. Static Line Pressure: 25 psi

**Mounting Position Effect:**

0.5" W.C. and higher 0.1% Span/g

Below 0.5" W.C. 0.25% Span/g

**Note:** Calibrated horizontally standard, unless otherwise specified. Mounting Position Effect easily corrected with zero potentiometer.

### ELECTRICAL SPECIFICATIONS

**Output Signal:**

4-20 mA\* (2 wire)

0-5 Vdc (3 wire)

1-5 Vdc (3 wire)

1-6 Vdc (3 wire)

0-10 Vdc (3 wire)

**Power:**

12-36Vdc

12-36Vdc

12-36Vdc

12-36Vdc

12-36Vdc

\*Optional CE versions available

**Output signal is independent of power**

**supply changes:**

12-36 Vdc range without effect on output signal

**Reverse Wiring Protected**

**Zero Span Potentiometers:** Externally accessible; non-interactive

ZERO ±5% Span

SPAN ±3% Span



Model RXLdp Ultra-Low Pressure Differential Transmitter

ELECTRICAL SPECIFICATIONS (cont.)

Supply Current: <6mA for voltage output

Warm-up Time:

Five seconds max. to meet stated specifications

PHYSICAL SPECIFICATIONS

Pressure Connections:

Stainless steel 1/8 NPT, 1/4" and 1/2" barbed connection

Electrical Connections: Terminal strip

Weight: 4.5 oz, NEMA 1 Case

MATERIALS:

Case/Cap: Stainless steel/Lexan

Media: Clean, dry and noncorrosive gas (consult factory for use on other media)



NOT FOR USE ON LIQUIDS

OPTIONS

- (XRK) Back plate adapter
- (XRH) Calibration report
- (XCL) Custom calibration
- (XCE) CE compliant 4-20mA only

NOTES:

- Consult factory on other pressure range, temperature compensation, packaging variations or response times available

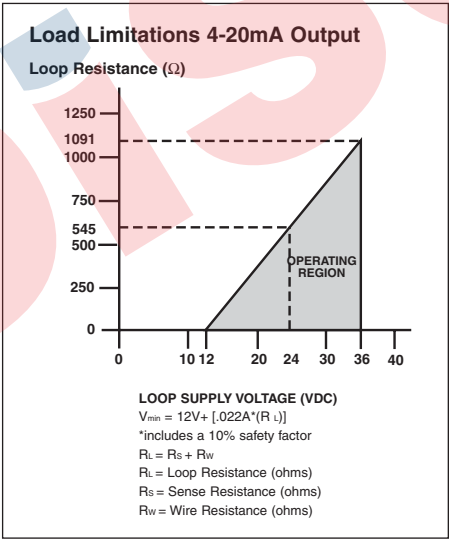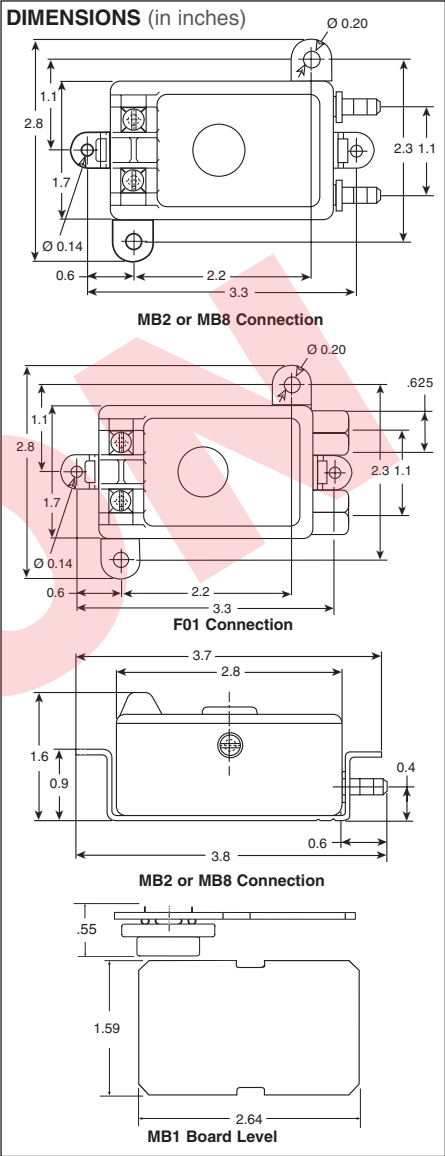

How To Order

<b>R X</b>	<b>7</b>				<b>S T</b>		<b>X</b>
<b>Type Configuration</b> (RXLdp)	<b>Accuracy/TC</b> (7) 1.00%, ±0.025%/°F		<b>Output Signal</b> (05) 0-5 Vdc (10) 0-10 Vdc (15) 1-5 Vdc (16) 1-6 Vdc (42) 4-20mA	<b>Electrical "Termination"</b> (ST) Electric Terminal		<b>Pressure Range</b>	<b>Optional X-Variation (XRK)</b> Back Plate Adapter (XRH) 9pt Calibration Report (XCE) CE Approval Option (4-20mA Output) (XCL) Custom calibration
		<b>Pressure Connection</b> (MB2) 1/4 Barbed Male (MB8) 1/2 Barbed Male (MB1) Board Level/No Case (F01) 1/2 NPT Female				<b>Diff. or Gauge:</b> (P1IW) 0.10"W.C. (P25IW) 0.25"W.C. (P5IW) 0.50"W.C. (P75IW) 0.75"W.C. (1IW) 1.00"W.C. (1P5IW) 1.50"W.C. (2IW) 2.00"W.C. (2P5IW) 2.50"W.C. (3IW) 3.00"W.C. (5IW) 5.00"W.C. (10IW) 10.00"W.C. (25IW) 25.00"W.C. (50IW) 50.00"W.C.	<b>Compound:</b> (P05IW) ±0.05"W.C. (P1IW) ±0.10"W.C. (P25IW) ±0.25"W.C. (P5IW) ±0.50"W.C. (1IW) ±1.00"W.C. (2P5IW) ±2.50"W.C. (5IW) ±5.00"W.C. (10IW) ±10.00"W.C. (25IW) ±25.00"W.C. (50IW) ±50.00"W.C.

ISO 9001  
REGISTERED FIRM

BULLETIN CT-4

All specifications are subject to change without notice.  
All sales subject to standard terms and conditions.  
© Ashcroft Inc. 2007 8/07

Ashcroft Inc., 250 East Main Street, Stratford, CT 06614 USA  
Tel: 203-378-8281 • Fax: 203-385-0408  
email: info@ashcroft.com • www.ashcroft.com