

Flexible conduits metal plastic



3878 23

P2 conduit for high/low temperature

Double hemming steel conduit with a special PVC covering suitable for applications in extremes of temperature.

pack (m)	cat. nos. AT grey	diameter		rta cat. nos.
		inside	outside	
50	3878 21	10.0	15.5	P210AT
50	3878 22	12.0	18.0	P212AT
50	3878 23	15.5	21.5	P216AT
50	3878 24	20.5	27.0	P221AT
25	3878 25	26.5	33.5	P227AT
25	3878 26	34.5	42.5	P235AT
25	3878 27	39.5	48.0	P240AT
25	3878 28	50.5	60.0	P252AT

pack (m)	cat. nos. BT grey	diameter		rta cat. nos.
		inside	outside	
50	3878 31	10.0	15.5	P210BT
50	3878 32	12.0	18.0	P212BT
50	3878 33	15.5	21.5	P216BT
50	3878 34	20.5	27.0	P221BT
25	3878 35	26.5	33.5	P227BT
25	3878 36	34.5	42.5	P235BT
25	3878 37	39.5	48.0	P240BT
25	3878 38	50.5	60.0	P252BT


P2X conduit

Pliable stainless steel conduit with double hemming structure, plain PVC covered.

pack (m)	cat. nos. grey	diameter		rta cat. nos.
		inside	outside	
50	3878 41	10.0	15.5	P2X10
50	3878 42	12.0	18.0	P2X12
50	3878 43	15.5	21.5	P2X16
50	3878 44	20.5	27.0	P2X21
25	3878 45	26.5	33.5	P2X27
25	3878 46	34.5	42.5	P2X35
25	3878 47	39.5	48.0	P2X40
25	3878 48	50.5	60.0	P2X52

Flexible conduits metal plastic

Dimensions

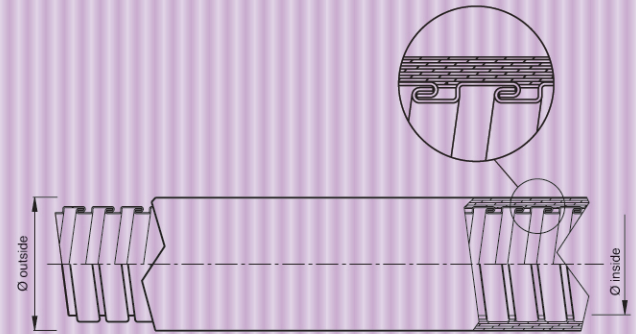

P2 for high/low temperatures

Characteristics:

material:

Double hemming flexible
galvanized steel (FeP01-02)
PVC covered

temperature rating:

P2 AT -15°C +105°C
P2 BT -25°C +60°C

classification CEI EN 50086 :

P2 AT 4 4 3 3
P2 BT 4 4 4 1

self-extinguishing:

non-flame propagating according
to CEI EN 50086

UV resistance:

superior

index of protection:

IP65 with 2000 Metal connectors

→ BENDING RADIUS PAGE 22

P2X

Characteristics:

material:

Flexible stainless steel AISI 304
PVC covered

temperature rating:

-15°C +60°C

classification CEI EN 50086 :

4 4 3 1

self-extinguishing:

non-flame propagating according
to CEI EN 50086

UV resistance:

superior

index of protection:

IP65 with 2000 Metal connectors
IMQ DAT n° EP251)

→ BENDING RADIUS PAGE 22

Connectors



2000 Metal
connector
page 84



Kit Silok
page 94

Flexible conduits overbraided



3871 93

FTR conduit


Simple hemming galvanized steel conduit, PVC covered and with outer casing of galvanized steel braid.
Suitable for screening electromagnetic radiation.
Provides attenuation of approximately 20dB for frequencies from 30MHz to 280MHz.

pack (m)	cat. nos.	diameter		rta cat. nos.
		inside	outside	
50	3871 90	10.0	16	FTR10
50	3871 91	12.0	18	FTR12
50	3871 92	15.5	21	FTR16
50	3871 93	20.5	26	FTR21
25	3871 94	26.5	33	FTR27
25	3871 95	34.5	42	FTR35
25	3871 96	39.5	47	FTR40
25	3871 97	50.5	57	FTR52

Flexible conduits overbraided

FTR

Dimensions

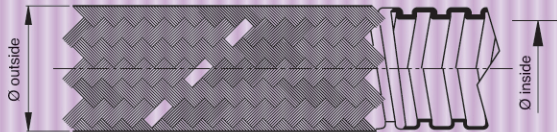


Characteristics:

material: Flexible galvanized steel (FeP01-02) PVC covered.
temperature rating: Outside galvanized steel braid.
classification CEI EN 50086 : - 15°C +60°C
self-extinguishing: 3 3 3 1
index of protection: non-flame propagating according to CEI EN 50086
EMI compatibility: IP43 with 2000 Metal connectors
20dB on 30-280 Mhz frequency band

→ BENDING RADIUS PAGE 22

Connectors:

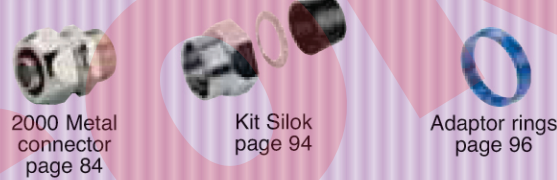

2000 Metal
connector
page 84

Kit Silok
page 94

Adaptor rings
page 96