


Xenius® Regular Pro (XRP) Heating Cable

up to 90°C

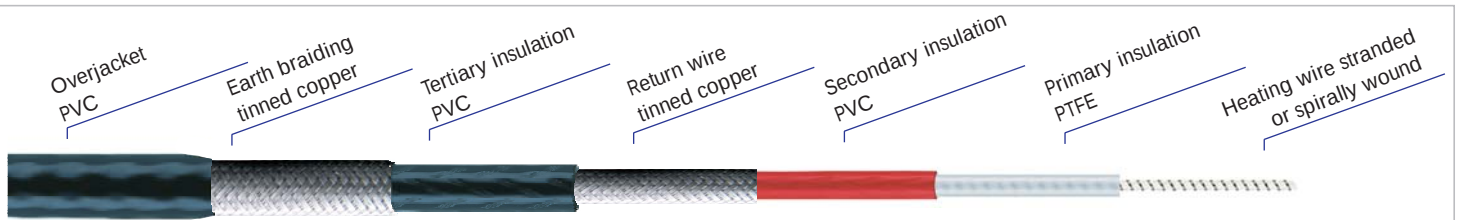

Description of heating cable

- Power connection at one end
- Durable
- Economical frost protection of e.g. pipes, gutters, floors, sloping surfaces
- Economical heating systems for industrial equipment in aggressive atmosphere
- Easy to install

Technical Data

Primary insulation PTFE
 Secondary insulation PVC
 Return wire tinned copper
 Tertiary insulation PVC
 Earth braiding tinned copper
 Overjacket PVC
 Nominal temperature 90 °C
 Nominal voltage 300/500 V
 Cross section of return wire 1.4 mm²
 Max. loading 20 W/m
 Max. operating temperature 80°C
 Min. bending radius 30 mm
 Min. installation
 temperature + 5°C
 Moisture protected yes

Item	Resistance [Ω/m]
XRP 0.2	0.2
XRP 0.25	0.25
XRP 0.36	0.36
XRP 0.45	0.45
XRP 0.65	0.65
XRP 0.80	0.80
XRP 1	1.0
XRP 1.3	1.3
XRP 1.75	1.75
XRP 2.52	2.52
XRP 4	4.0
XRP 5.1	5.1
XRP 8	8.0
XRP 12	12
XRP 40	40
XRP 65	65
XRP 140	140

Standards

Manufactured according to DIN VDE 0253
 Test procedure acc. to . . . 2.5 kV AC